

ROTAVATOR

The rotary tiller is mainly used for preparing seed bed and improves the health of soil by mixing the residuals of the previous harvest into it.




1 IT CAN LOOSEN & AERATE THE SOIL UP TO 6 INCHES DEEP.

2 WE USE BORON STEEL BLADES THAT LAST 50% MORE THAN HI CARBON.

3 HEAVY-DUTY PTO SHAFT WITH SHEAR BOLT FOR OVERLOAD PROTECTION.

4 OUR ROTAVATOR PUTS LESS LOAD ON THE TRACTOR, WHICH MAKES TILLAGE FAST AND ECONOMICAL.

5 HEAVY DUTY SPRING ASSEMBLY IN PLANK WHICH ENSURES PERFECTLY LEVELLED AND FINISHED SEEDBED.

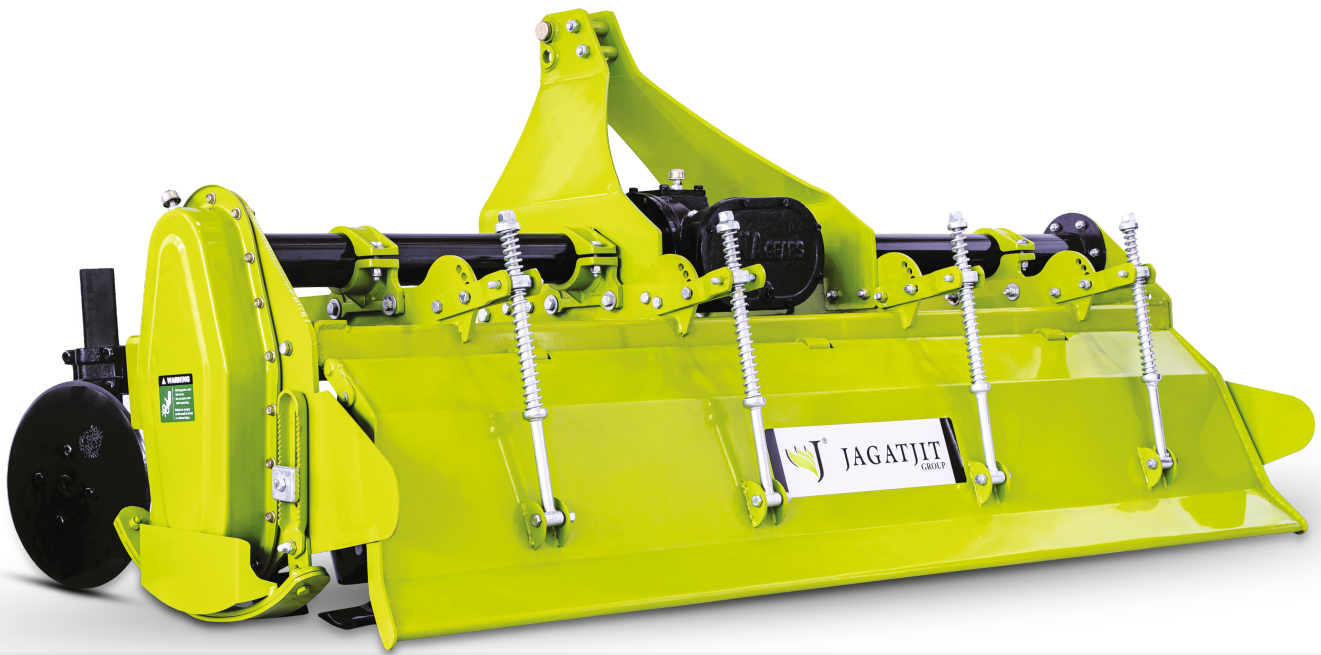

ROTAVATOR SPECIFICATION

Size (In Feet)	4	5	6	7	8	9	10
Working Width (Mm)	1188	1424	1805	2000	2390	2585	2935
Type of Blade	L/C/J/LJF TYPE						
Thickness of Blade(mm)	7 MIN						
No. of Blades	30/42	36/42	42/48	48/54	54/60	60/66	66/72
Weight (Kg Approx)	390	410	440	500	590	630	670
Tractor Power (HP)	35-40	40-45	45-50	50-55	55-60	60-75	60-75
Length	1530	1754	2135	2330	2720	2915	3265
Width	1187	1187	1187	1187	1187	1187	1187
Height	1200	1200	1200	1200	1200	1200	1200

ROTAVATOR MINI SERIES

MODEL NAME	LENGTH (MM)	WIDTH (MM)	HEIGHT (MM)	SIZE (IN FEET)	TILLAGE WIDTH	GEAR BOX	SIDE TRANSMISSION	TYPE OF BLADE	NO. OF BLADE	NO. OF FLANGES	WEIGHT (IN KG APPROX.)	REQUIRED TRACTOR POWER (HP)
JRVI-04B4-LDSSG3C	698	1343	945	4	1200	single speed	Gear Drive	C Type	24	6	215	20-35
JRVI-3.5B4-LDSSG3C		1205		3.5	1059				20	5	194	20-30
JRVI-03B4-LDSSG3C		1043		3	900				16	4	180	15-25
JRVI-04B4-LDSSG3G		1343		4	1200			L Type	24	6	227	20-35
JRVI-3.5B4-LDSSG3G		1205		3.5	1059				20	5	204	20-30
JRVI-03B4-LDSSG3G		1043		3	900				16	4	188	15-25

SARON MECHANICAL WORKS

Mansa Rood, Chema Mandi (Distt, Sangrur), PUNJAB,
+91 91000 37000 | info@jagatjitgroup.com
 www.jagatjitgroup.com

FOR EXPORT
 export@jagatjitgroup.com



DEALER / DISTRIBUTOR